

HT ERONET

Konfiguracija ADSL modema ZyXEL AMG1202




Konfiguracija modema ZyXEL AMG1202

Funkcionalnost lampica


- **Power** označava napajanje.
- **Ethernet 1, 2 ... 4** - u portu/portovima je spojen mrežni UTP kabel (ako lampica/lampice gore).
- **WPS/WLAN** - uključen bežični WLAN signal (ako lampica gori)
- **DSL** označava ADSL signal i ona konstantno svijetli ako signal uredno dolazi do modema
- **Internet** lampica svijetli zelenom bojom kada je modem u routed modu i spojen je na Internet

Proces konfiguracije putem čarobnjaka za brzi set-up

Modemu se pristupa putem web browsera tako što se u 'address bar' upiše IP adresa 192.168.2.1

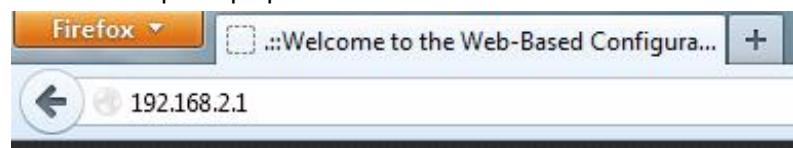


Nakon čega se otvara prozor za logiranje, defaultni account - Username: **user** Password: **1234**

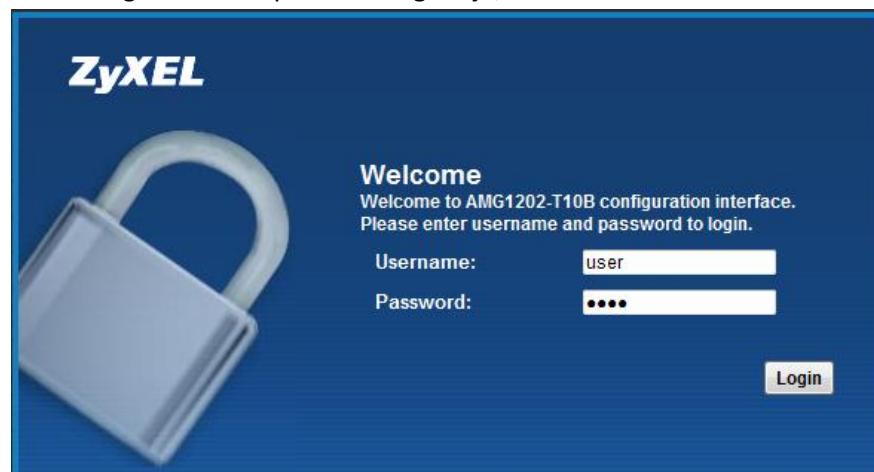

U sljedećem koraku možete promijeniti lozinku za pristup ili preskočiti ovu operaciju:




Nakon uspješno obavljenog logiranja potrebno je kliknuti na 'Wizard' opciju (nalazi se u gornjem desnom dijelu prozora)

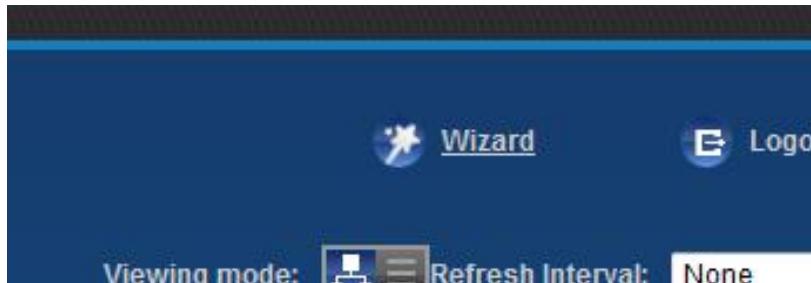

Potom se pokreće čarobnjak za brzu konfiguraciju te je potrebno proći kroz sljedeće korake:

1) Odabir vremenske zone

Podesiti vremensku zonu te kliknuti na 'Next' dugme

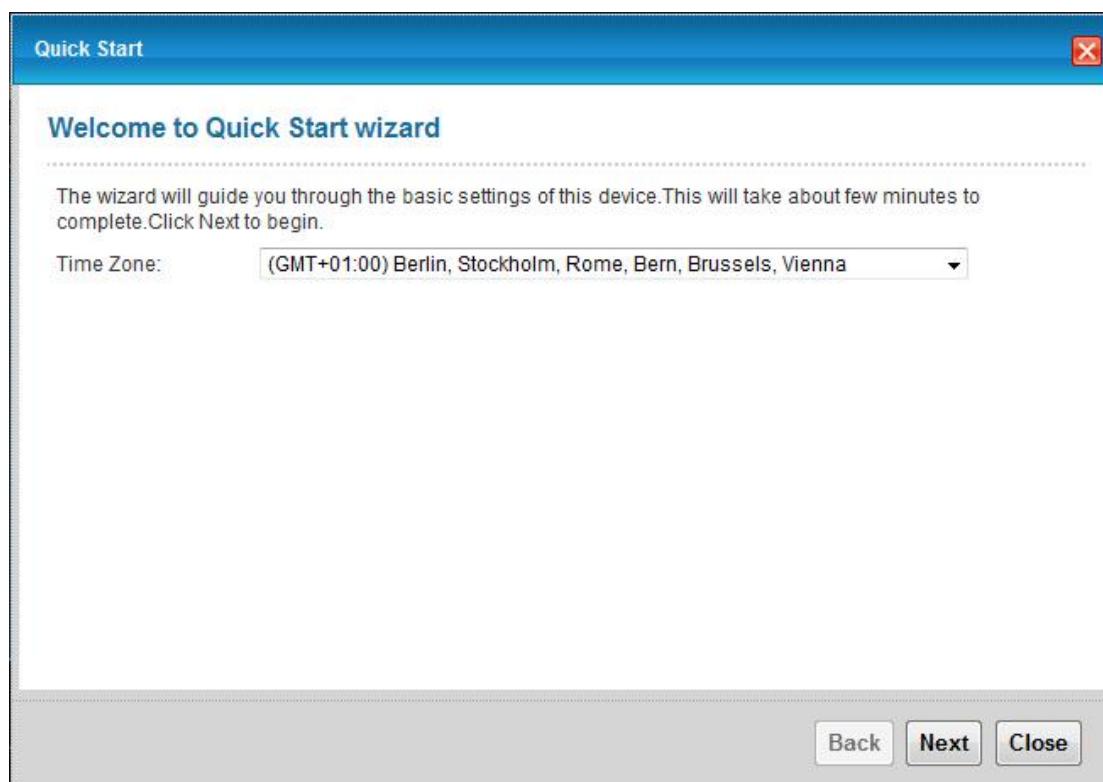

2) Internet postavke

Unijeti vaše ADSL korisničko ime i lozinku, ostalo kao na slici. (prikazana je 'routed mode' konfiguracija)

Internet Configuration

The current connection type is set to PPPoE and needs a user name and password to get online.

Encapsulation:	PPPoE
User Name:	vasekorisnickoime
Password:	*****
Service Name:	
Multiplex:	LLC
VPI:	8 (Range : 0~255)
VCI:	35 (Range : 32~65535)

Is there specific IP address information from your Internet Service Provider (ISP)?

Yes No

Then the IP Address information will be dynamically assigned to you from your ISP.

Back **Next** Close

3) Postavke bežične WLAN mreže

Wireless Service: uključi/isključi bežičnu mrežu

Wireless Network Name (SSID): ime Vaše bežične mreže

Channel Selection: odabir bežičnog frekvencijskog kanala

Pre-Shared Key: lozinka za bežični pristup

Wireless Setup

The following settings are the current wireless settings which your wireless client devices need in order to get connected to this device.

Wireless Service:	<input checked="" type="checkbox"/>
Wireless Network Name (SSID):	ZyXEL_086C
Channel Selection :	Channel 1
Security Level:	WPA-PSK/WPA2-PSK
Pre-Shared Key:	M7EEEHPTFX7X7 <small>(Enter 8-63 characters or 64 hexadecimal digits (a-f, A-F, and 0-9.).)</small>

Back **Next** Close

4) Završavanje procesa konfiguracije

Počinje klikom na 'Next' dugme u prozoru za postavke bežične mreže. Klikom na 'Close' dugme čarobnjak se zatvara, konfiguracija modema je završena.

